


Safe-X 1000

Flashback arrestor

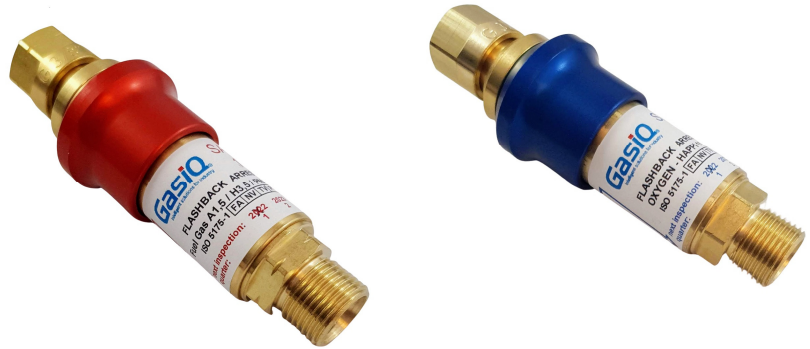

Product features

- Avoids dangerous gas mixtures by a gas non-return valve (NV)
- Stops flashback through flame arrestor (FA)
- A temperature-sensitive cut-off valve stops the gas flow when a predetermined temperature is exceeded (TV)
- Interrupts the further gas flow on pressure shocks by a resettable pressure-sensitive cut-off valve (PV)
- A dust filter protects the gas non-return valve against contamination
- Every Safe-X 1000 is 100% tested
- Safety device according to DIN EN ISO 5175-1

Safety elements of the GasiQ Safety device Safe-X 1000 :

- NV, Gas non-return valve
- FA, Flame arrestor
- TV, Temperature-sensitive cut-off valve
- PV, Pressure-sensitive gas cut-off valve
- DF, Dust filter

Maintenance:

The safety device are to be tested by a qualified and authorised person at regular intervals according to Country specific regulations. The safety device is to be tested for gas tightness, gas flow and gas return once every 24 months .

Flowcharts

Type: Safe-X 1000

Flow rates [air]:

p_v = Primary pressure




p_h = Secondary pressure

Δp = Primary pressure minus Secondary pressure

Conversion Factors:


0,1 MPa = 1 bar = 100 kpa = 14,504 psi

1 m³ /h = 35,31 cu ft/h

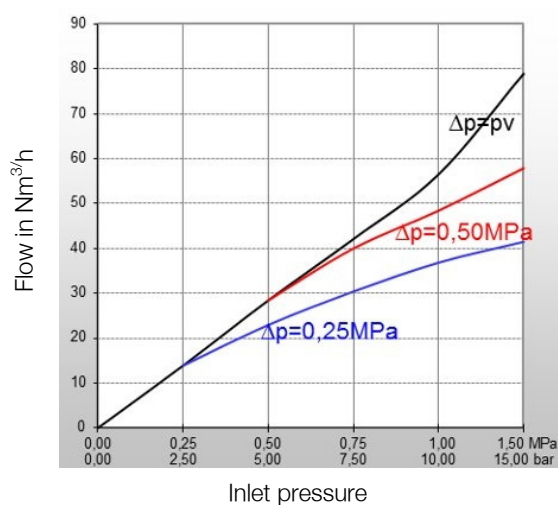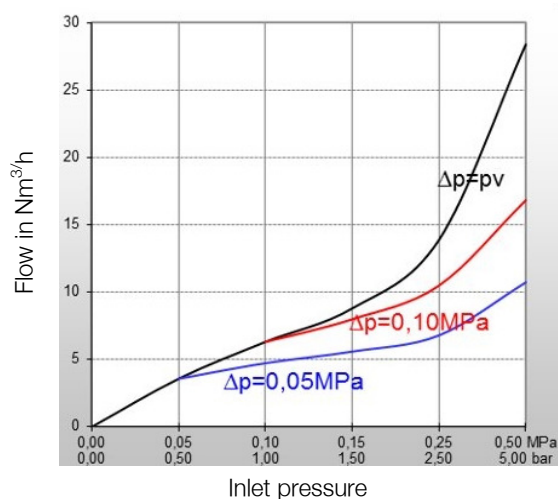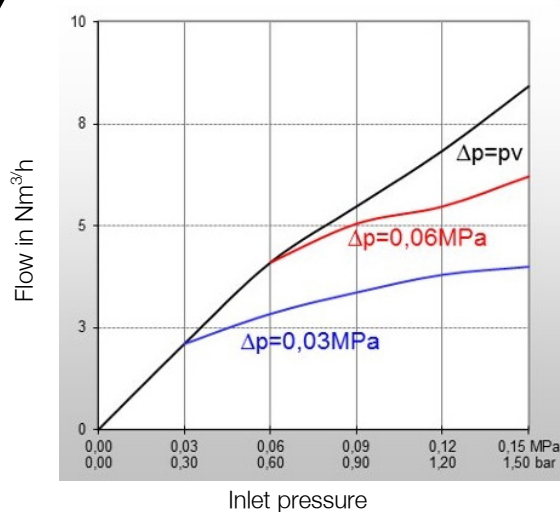

	A	H	P	M	M	O	E	L
QG ►	C ₂ H ₂	H ₂	C ₃ H ₈	CH ₄ +C	CH ₄	O ₂	C ₂ H ₄	C ₃ H ₆
F	1,2	3,8*	0,9	1,25	1,4	0,95	1,02	0,92

Exempel:

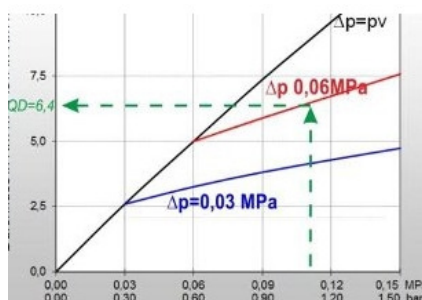

QG = QD x F

QG ► A = 6,4 x 1,2 = 7,68 m³/h C₂H₂

QG = flow / gas type


F = conversion factor

QD = flow / air

Technical data

Gas types:	Acetylene / Propane / Oxygen
Working pressure:	
Acetylene	0,15MPa/1,5bar
Oxygen	0,50MPa/5 bar
Cracking pressure:	50mbar position-independent
Gas temperature:	-20°C up to +70°C (Oxygen -20°C up to +60°C)
Ambient temperature:	-20°C up to +70°C

Dimensions

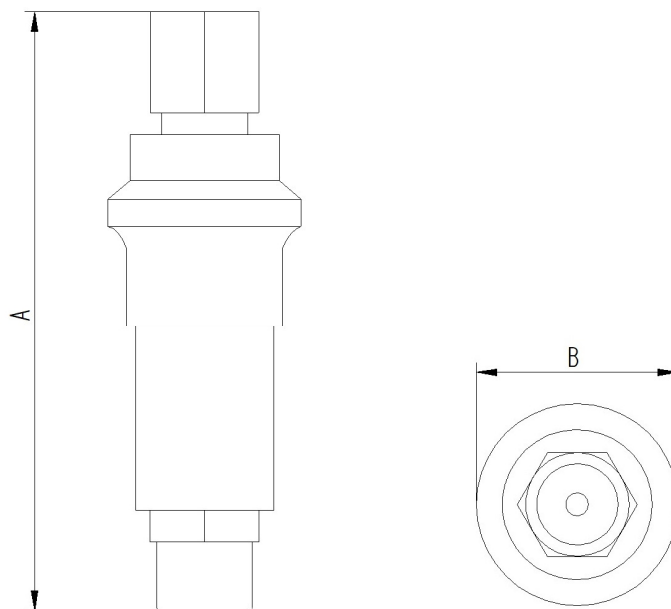

Safe-X 1000			
Inlet	Outlet	A	B
3/8" F	3/8" F	107mm	35mm
3/8" L/F	3/8" L/F	107mm	35mm