

Safe-X 2000 Flashback Arrestor



Product features

- Avoids dangerous gas mixtures by a gas non-return valve (NV)
- Stops flashback through flame arrestor (FA)
- A temperature-sensitive cut-off valve stops the gas flow when a predetermined temperature is exceeded (TV)
- Interrupts the further gas flow on pressure shocks by a resettable pressure-sensitive cut-off valve (PV)
- A dust filter protects the gas non-return valve against contamination
- Every Safe-X 2000 is 100% tested
- Safety device according to DIN EN ISO 5175-1, AS 4603

Safety elements of the GasiQ Safety device Safe-X 2000 :

- NV, Gas non-return valve
- FA, Flame arrestor
- TV, Temperature-sensitive cut-off valve
- PV, Pressure-sensitive gas cut-off valve
- DF, Dust filter

Maintenance:

The safety device are to be tested by a qualified and authorised person at regular intervals according to Country specific regulations. The safety device is to be tested for gas tightness, gas flow and gas return once every 24 months.

Flowchart

Type: Safe-X 2000

Flow rates [air]:

pv = Primary pressure




ph = Secondary pressure

Δp = Primary pressure minus Secondary pressure

Conversion Factors:


0,1 MPa = 1 bar = 100 kpa = 14,504 psi

1 m³ /h = 35,31 cu ft/h

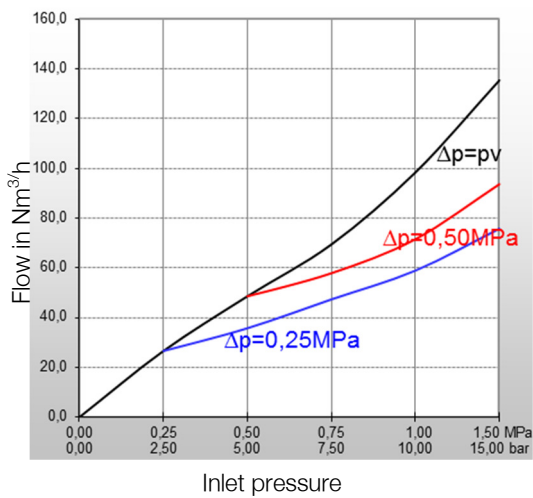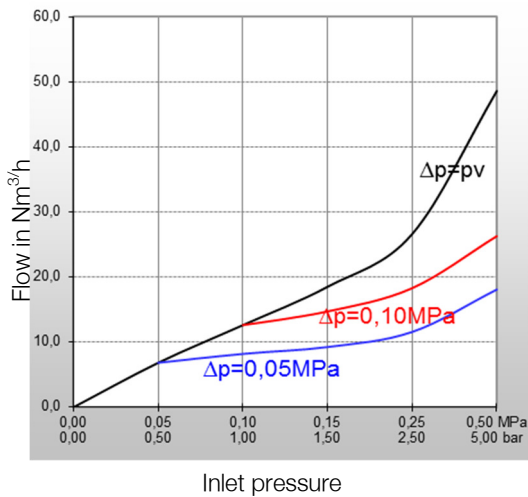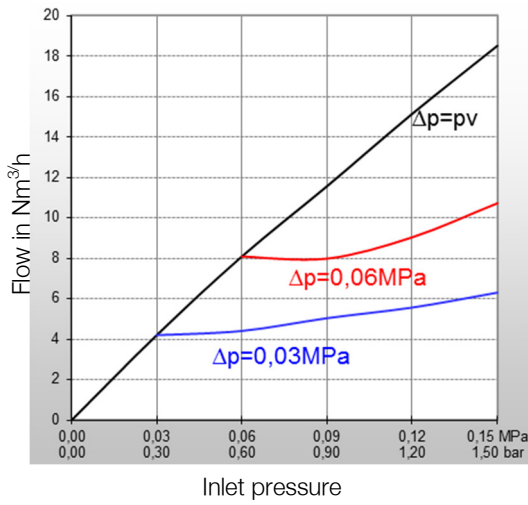

	A	H	P	M	M	O	E	L
QG ▶	C2H2	H2	C3H8	CH4+C	CH4	O2	C2H4	C3H6
F	1,2	3,8*	0,9	1,25	1,4	0,95	1,02	0,92

Example:

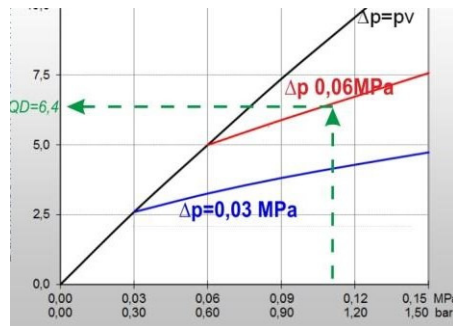

$$QG = QD \times F$$

$$QG \blacktriangleright A = 6,4 \times 1,2 = 7,68 \text{ m}^3/\text{h C2H2}$$

QG = flow / gas type

F = conversion factor

QD = flow / air

Technical data

Gas	Acetylene	Propane	Oxygen
Working pressure	0,15 MPa 1,5 bar	0,50 MPa 5,0 bar	1,50 MPa 15,0 bar
Cracking pressure	50 mbar Position-independent		
Gas temperature	-20°C up to +70°C (Oxygen -20°C up to +60°C)		
Ambient temperature	-20°C up to +70°C		
Thread connection	G3/8"LH		G3/8"RH
Measure & weight	Diameter	Length	Weight
	46,00	122,0	491,0 g
Applications			
Process	Welding	Cutting	Heating
	Up to 30mm	Up to 700mm	> 100mm