

Important

Information about central gas system.

Max 40 bar pressure in central gas systemet.

Max 30 bar pressure in the inline pressure gauge accessory.




Max 10 bar pressure in flowmeter.

Dual socket plugs can be replaced with 3/8" nipples for up to four outlets.


Flowmeter tubes are available in 20 liter and 34 liter versions.

Our central gas system is built with right threaded inlets but can be built with both left or right threaded outlets based on which type of gas that is going to be used.


Nippel is available in several options, visit Gasiq.com for more info.

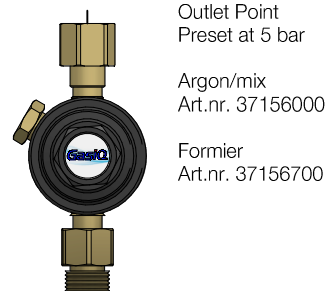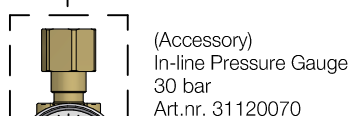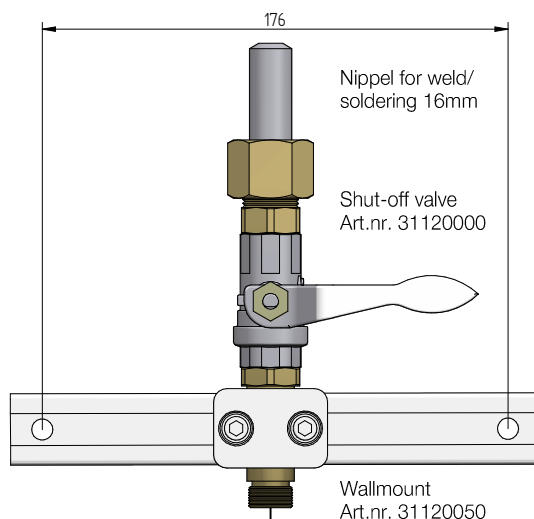

Accessories/Options



Dual socket
Art.nr. 31120040

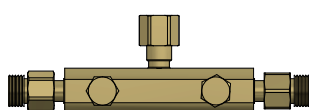

Dual Socket side outlet
Art.nr. 31121040



Plug
Art.nr. 37630326



Nippel G3/8"
Art.nr. 32080012



Adapter G3/8"-G3/8"L
Art.nr. 37180016



Angeled connection G3/8"
Art.nr. 31630107


Outlets for all needs




Quick connector
Female AR/MIX G3/8"
Art.nr. 3010-0300




Twin outlet
AR/OX G3/8"
Art.nr. 30200000

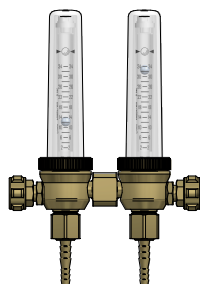

Dual Flowmeter. 34L/min.
Art.nr. 37122530

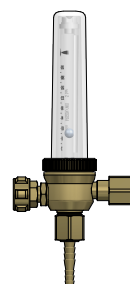

Flowmeter. 34L/min.
Art.nr. 37120530

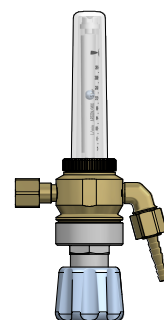

Optimator®. 34L/min.
Art.nr. 37123260

Fuel gas G3/8"L
Art.nr. 30100200

Fuel gas G3/8"L
Art.nr. 30200100

Formier G3/8"L
Art.nr. 37122730

Formier G3/8"L
Art.nr. 37120730

